
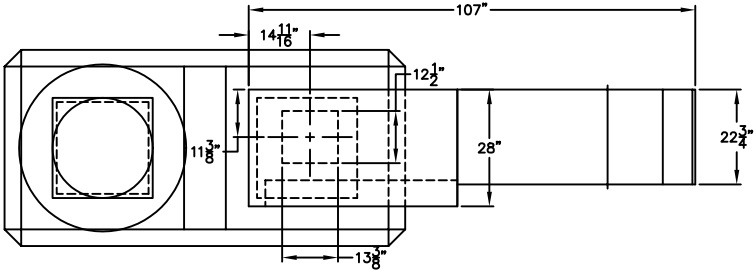



GENERAL NOTES

UNLESS OTHERWISE NOTED, ALL EXTERIOR SURFACES WILL BE 18 GA. GALVANIZED STEEL.

CURB SKIRT DETAIL




PLAN VIEW

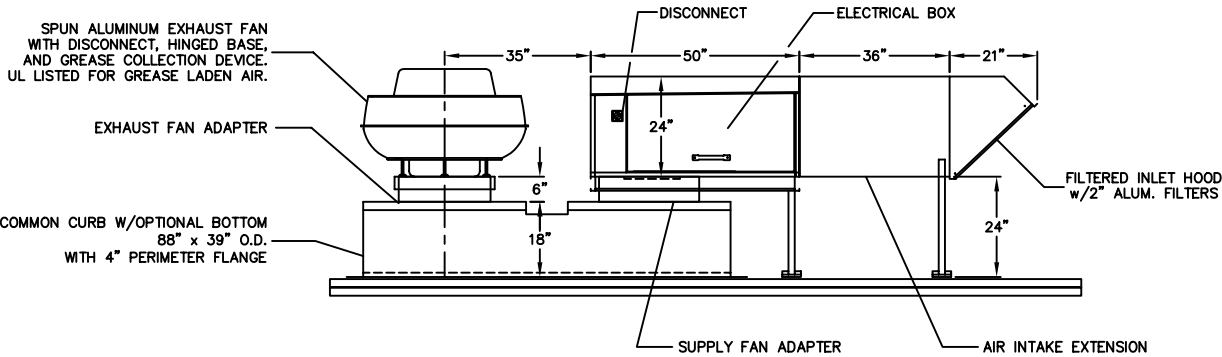

ELEVATION VIEW

|                       |
|-----------------------|
| PROJECT NAME:         |
| REF. NO./DRAWING NO.: |
| DATE:                 |



| ENGINEERING SPECIFICATIONS             |          |                |
|----------------------------------------|----------|----------------|
| MODEL: CAA-NH-V1-CC                    |          |                |
| C.F.M.:                                | T.S.P:   | E.S.P.:        |
| H.P.:                                  | VOLTAGE: | SERVICE AMPS.: |
| BLOWER MODEL # G10-8                   |          |                |
| STANDARD FEATURES:                     |          |                |
| GALVANIZED STEEL CASING; UNPAINTED     |          |                |
| DOWN DISCHARGE CONFIGURATION           |          |                |
| 24V REMOTE CONTROL PANEL               |          |                |
| ONE EXHAUST FAN STARTER                |          |                |
| VIBRATION ISOLATORS                    |          |                |
| REMOVABLE BIRDSCREEN                   |          |                |
| OPTIONAL FEATURES:                     |          |                |
| NOTES:                                 |          |                |
| SUPPLY AIR FLOW RANGE: UP TO 1,700 CFM |          |                |

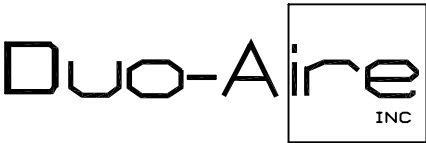


# GENERAL NOTES

UNLESS OTHERWISE NOTED, ALL EXTERIOR SURFACES WILL BE 18 GA. GALVANIZED STEEL.

# CURB SKIRT DETAIL

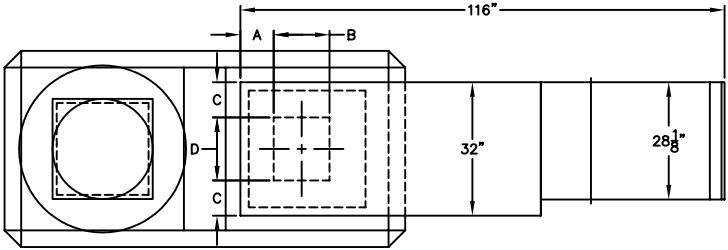

PLAN VIEW

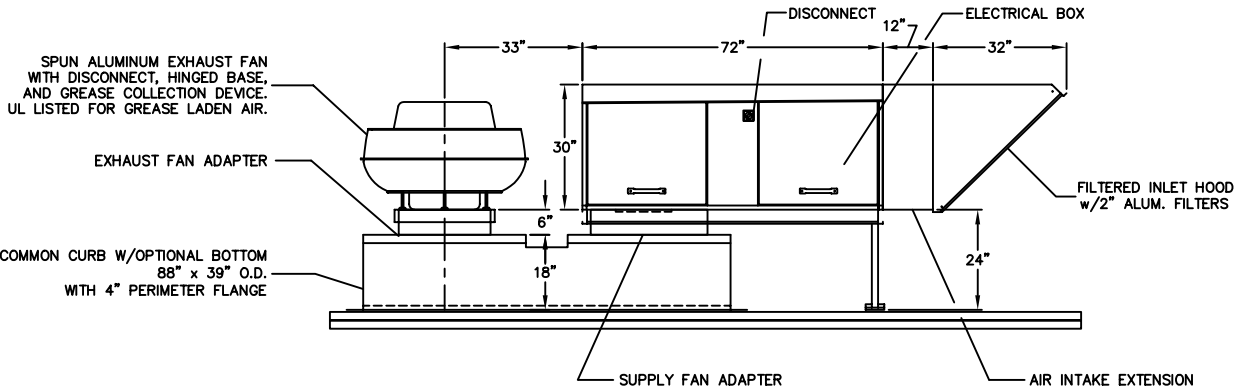

ELEVATION VIEW

| CFM RANGE   | FAN SIZE | A     | B       | C      | D      |
|-------------|----------|-------|---------|--------|--------|
| 1,600-2,400 | G10      | 8     | 13 3/8  | 8 7/16 | 15 1/8 |
| 2,401-3,500 | G12      | 9 1/4 | 15 7/16 | 7 3/16 | 17 5/8 |

PROJECT NAME:

REF. NO./DRAWING NO.:

DATE:

# ENGINEERING SPECIFICATIONS

MODEL: CAA-NH-V2-CC

C.F.M.: T.S.P.: E.S.P.:

H.P.: VOLTAGE: SERVICE AMPS.:

BLOWER MODEL # G10 OR G12

## STANDARD FEATURES:

GALVANIZED STEEL CASING; UNPAINTED

DOWN DISCHARGE CONFIGURATION

24V REMOTE CONTROL PANEL

ONE EXHAUST FAN STARTER


VIBRATION ISOLATORS

REMOVABLE BIRDSCREEN

## OPTIONAL FEATURES:

## NOTES:



SUPPLY AIR FLOW RANGE: 1,600 CFM TO 3,500 CFM




GENERAL NOTES

UNLESS OTHERWISE NOTED, ALL EXTERIOR SURFACES WILL BE 18 GA. GALVANIZED STEEL.

CURB SKIRT DETAIL

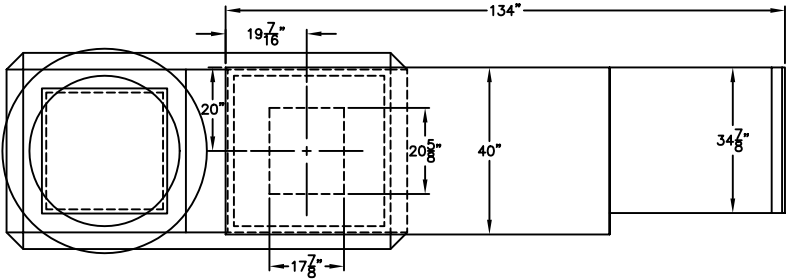


PLAN VIEW

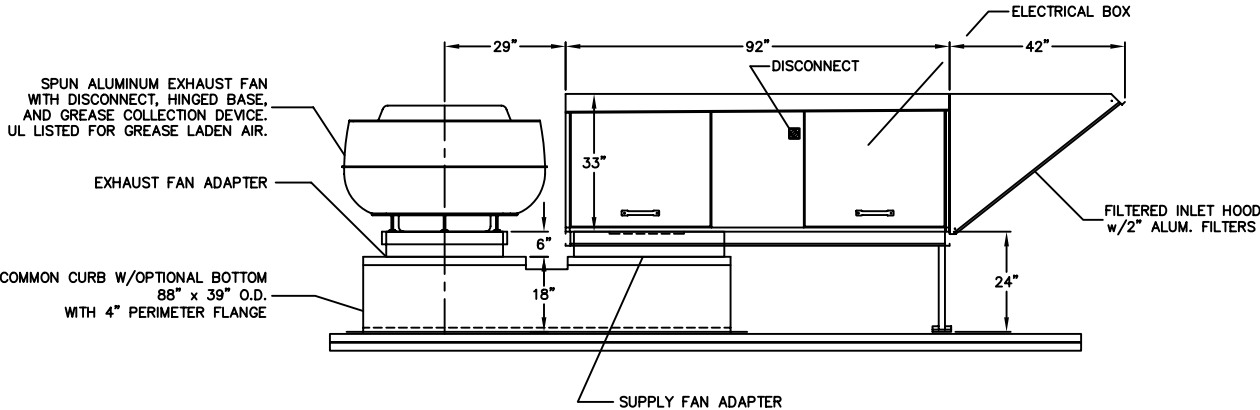

ELEVATION VIEW

|                       |
|-----------------------|
| PROJECT NAME:         |
| REF. NO./DRAWING NO.: |
| DATE:                 |



| ENGINEERING SPECIFICATIONS                    |          |                |
|-----------------------------------------------|----------|----------------|
| MODEL: CAA-NH-V3-CC                           |          |                |
| C.F.M.:                                       | T.S.P.:  | E.S.P.:        |
| H.P.:                                         | VOLTAGE: | SERVICE AMPS.: |
| BLOWER MODEL # G15                            |          |                |
| STANDARD FEATURES:                            |          |                |
| GALVANIZED STEEL CASING; UNPAINTED            |          |                |
| DOWN DISCHARGE CONFIGURATION                  |          |                |
| 24V REMOTE CONTROL PANEL                      |          |                |
| ONE EXHAUST FAN STARTER                       |          |                |
| VIBRATION ISOLATORS                           |          |                |
| REMOVABLE BIRDSCREEN                          |          |                |
| OPTIONAL FEATURES:                            |          |                |
| NOTES:                                        |          |                |
| SUPPLY AIR FLOW RANGE: 3,200 CFM TO 6,800 CFM |          |                |

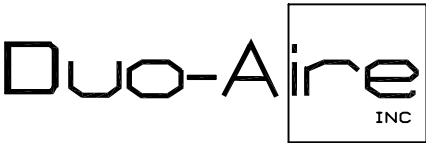


GENERAL NOTES

UNLESS OTHERWISE NOTED, ALL EXTERIOR SURFACES WILL BE 18 GA. GALVANIZED STEEL.

CURB SKIRT DETAIL

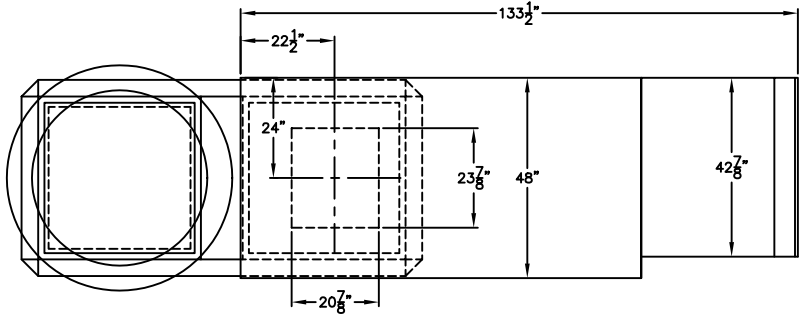


PLAN VIEW

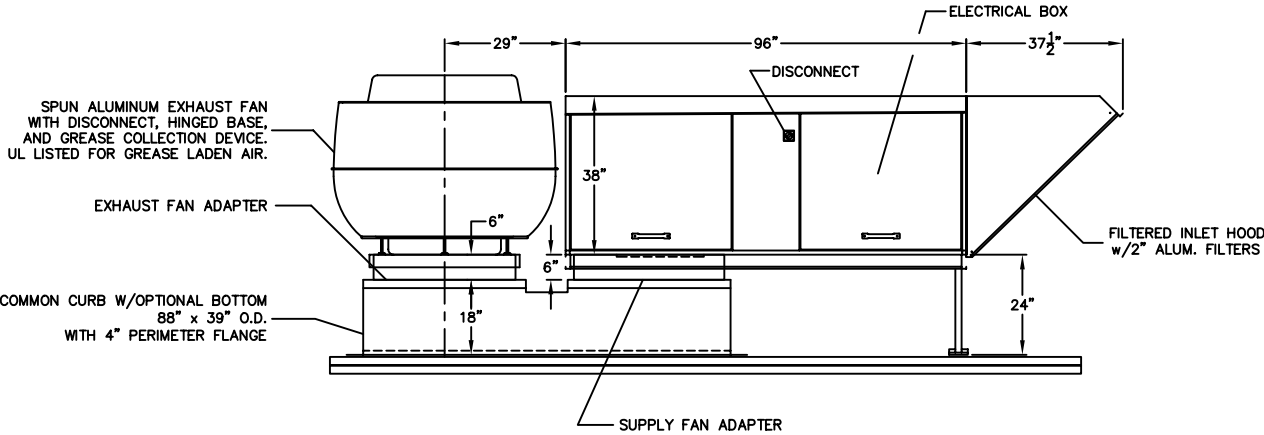

ELEVATION VIEW

PROJECT NAME:  
REF. NO./DRAWING NO.:  
DATE:


| ENGINEERING SPECIFICATIONS                    |          |                |
|-----------------------------------------------|----------|----------------|
| MODEL: CAA-NH-V4-CC                           |          |                |
| C.F.M.:                                       | T.S.P:   | E.S.P.:        |
| H.P.:                                         | VOLTAGE: | SERVICE AMPS.: |
| BLOWER MODEL # G18                            |          |                |
| STANDARD FEATURES:                            |          |                |
| GALVANIZED STEEL CASING; UNPAINTED            |          |                |
| DOWN DISCHARGE CONFIGURATION                  |          |                |
| 24V REMOTE CONTROL PANEL                      |          |                |
| ONE EXHAUST FAN STARTER                       |          |                |
| VIBRATION ISOLATORS                           |          |                |
| REMOVABLE BIRDSCREEN                          |          |                |
| OPTIONAL FEATURES:                            |          |                |
| NOTES:                                        |          |                |
| SUPPLY AIR FLOW RANGE: 4,900 CFM TO 8,100 CFM |          |                |

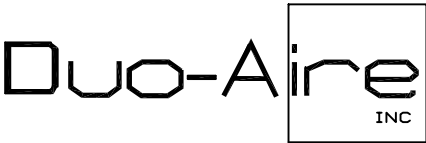


UNLESS OTHERWISE NOTED, ALL EXTERIOR SURFACES WILL BE 18 GA. GALVANIZED STEEL.

UNIT

CURB SKIRT

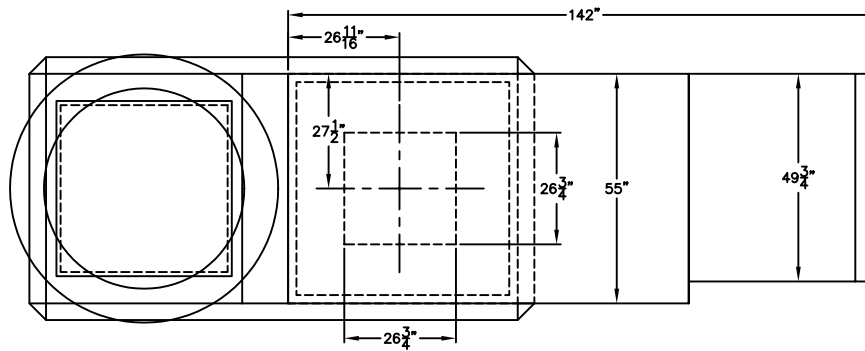

PLAN VIEW

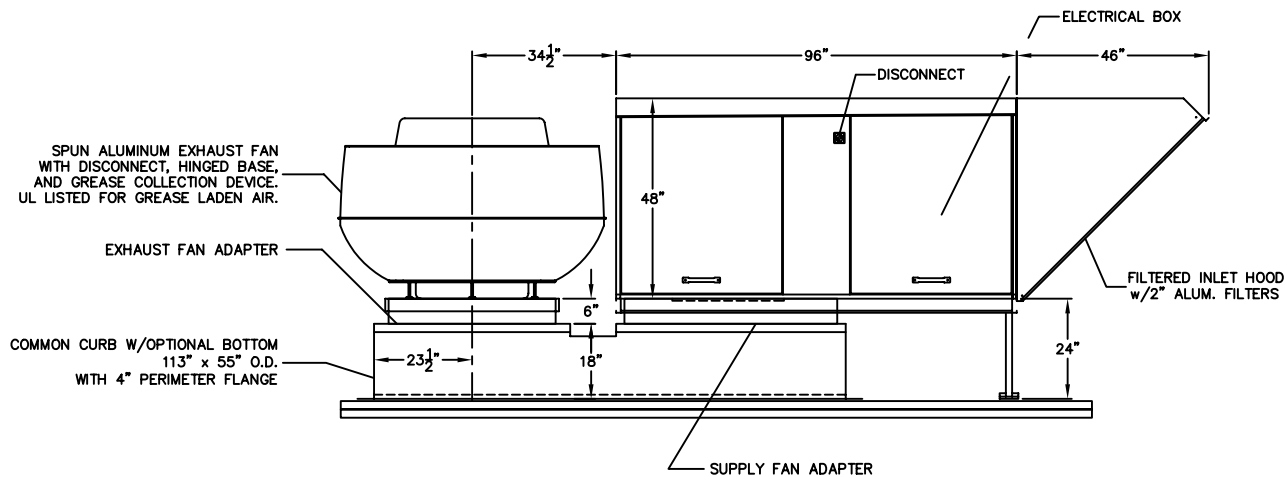

|                       |
|-----------------------|
| PROJECT NAME:         |
| REF. NO./DRAWING NO.: |
| DATE:                 |



|                     |          |                |
|---------------------|----------|----------------|
| MODEL: CAA-NH-V5-CC |          |                |
| C.F.M.:             | T.S.P.:  | E.S.P.:        |
| H.P.:               | VOLTAGE: | SERVICE AMPS.: |
| BLOWER MODEL # 920  |          |                |

Duo-Aire  
INC


GENERAL NOTES

UNLESS OTHERWISE NOTED, ALL EXTERIOR SURFACES WILL BE 18 GA. GALVANIZED STEEL.

CURB SKIRT DETAIL

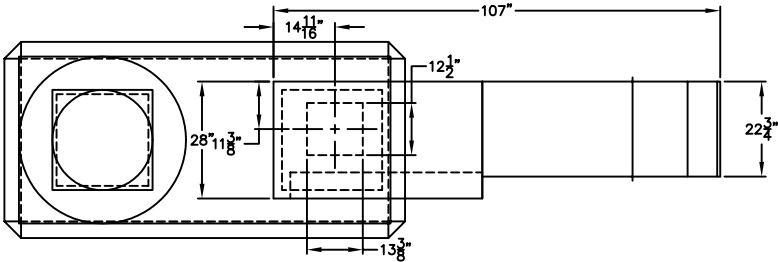


PLAN VIEW

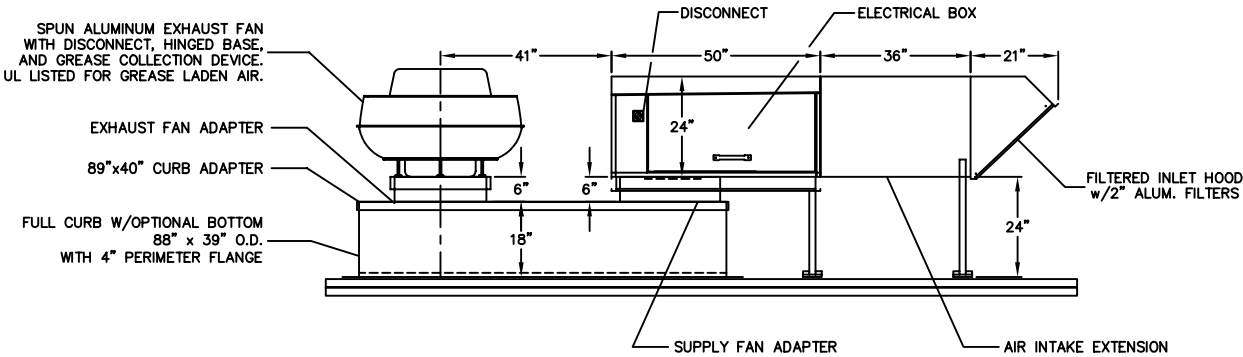

ELEVATION VIEW

|                       |
|-----------------------|
| PROJECT NAME:         |
| REF. NO./DRAWING NO.: |
| DATE:                 |



| ENGINEERING SPECIFICATIONS             |          |                |
|----------------------------------------|----------|----------------|
| MODEL: CAA-NH-V1-CC                    |          |                |
| C.F.M.:                                | T.S.P:   | E.S.P.:        |
| H.P.:                                  | VOLTAGE: | SERVICE AMPS.: |
| BLOWER MODEL # G10-8                   |          |                |
| STANDARD FEATURES:                     |          |                |
| GALVANIZED STEEL CASING; UNPAINTED     |          |                |
| DOWN DISCHARGE CONFIGURATION           |          |                |
| 24V REMOTE CONTROL PANEL               |          |                |
| ONE EXHAUST FAN STARTER                |          |                |
| VIBRATION ISOLATORS                    |          |                |
| REMOVABLE BIRDSCREEN                   |          |                |
| OPTIONAL FEATURES:                     |          |                |
| NOTES:                                 |          |                |
| SUPPLY AIR FLOW RANGE: UP TO 1,700 CFM |          |                |

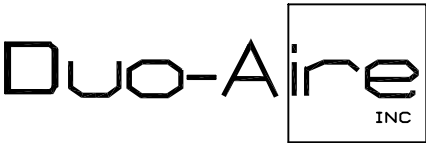


GENERAL NOTES

UNLESS OTHERWISE NOTED, ALL EXTERIOR SURFACES WILL BE 18 GA. GALVANIZED STEEL.

CURB SKIRT DETAIL

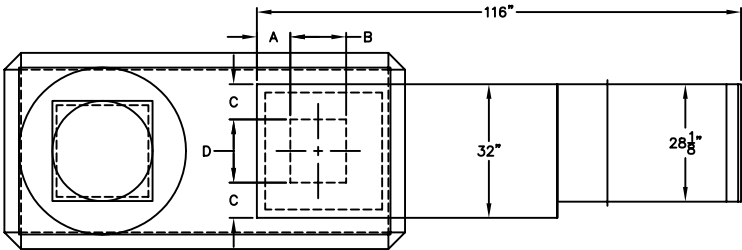

PLAN VIEW

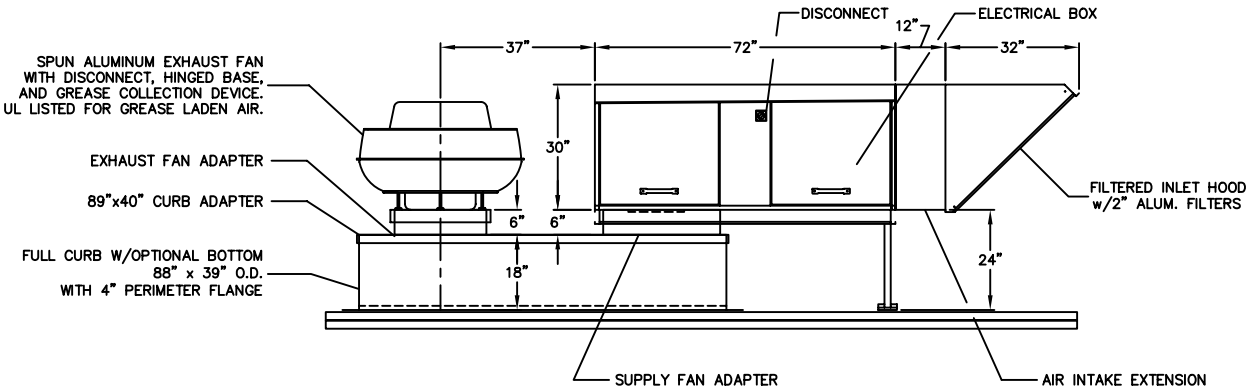

ELEVATION VIEW

| CFM RANGE   | FAN SIZE | A     | B       | C      | D      |
|-------------|----------|-------|---------|--------|--------|
| 1,600-2,400 | G10      | 8     | 13 3/8  | 8 7/16 | 15 1/8 |
| 2,401-3,500 | G12      | 9 1/4 | 15 7/16 | 7 3/16 | 17 5/8 |

PROJECT NAME:

REF. NO./DRAWING NO.:

DATE:

ENGINEERING SPECIFICATIONS

MODEL: CAA-NH-V2-CC

C.F.M.:T.S.P.:E.S.P.:

H.P.:VOLTAGE:SERVICE AMPS.:

BLOWER MODEL # G10 OR G12

STANDARD FEATURES:

GALVANIZED STEEL CASING; UNPAINTED

DOWN DISCHARGE CONFIGURATION

24V REMOTE CONTROL PANEL

ONE EXHAUST FAN STARTER


VIBRATION ISOLATORS

REMOVABLE BIRDSCREEN

OPTIONAL FEATURES:

NOTES:



SUPPLY AIR FLOW RANGE: 1,600 CFM TO 3,500 CFM

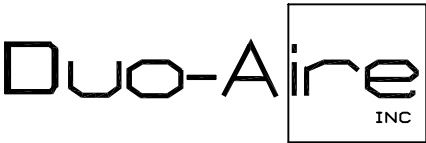


GENERAL NOTES

UNLESS OTHERWISE NOTED, ALL EXTERIOR SURFACES WILL BE 18 GA. GALVANIZED STEEL.

CURB SKIRT DETAIL

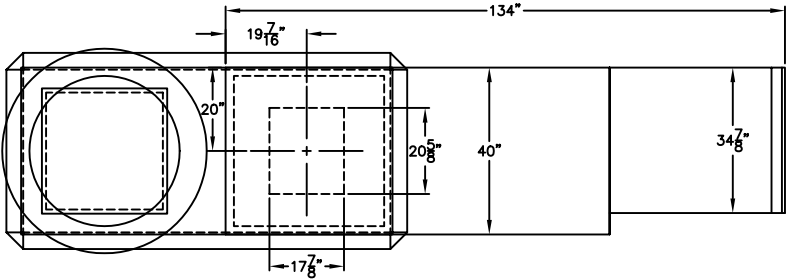


PLAN VIEW

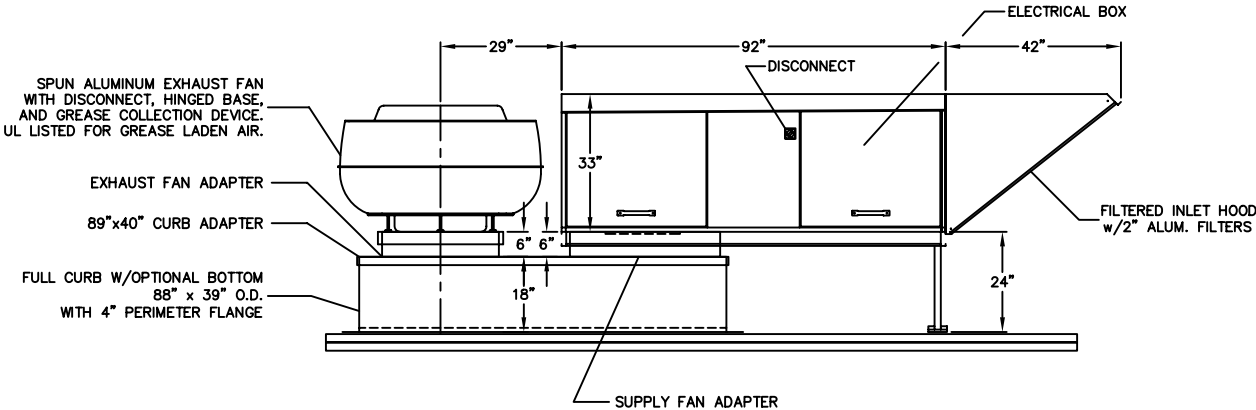

ELEVATION VIEW

|                       |
|-----------------------|
| PROJECT NAME:         |
| REF. NO./DRAWING NO.: |
| DATE:                 |



| ENGINEERING SPECIFICATIONS                    |          |                |
|-----------------------------------------------|----------|----------------|
| MODEL: CAA-NH-V3-CC                           |          |                |
| C.F.M.:                                       | T.S.P.:  | E.S.P.:        |
| H.P.:                                         | VOLTAGE: | SERVICE AMPS.: |
| BLOWER MODEL # G15                            |          |                |
| STANDARD FEATURES:                            |          |                |
| GALVANIZED STEEL CASING; UNPAINTED            |          |                |
| DOWN DISCHARGE CONFIGURATION                  |          |                |
| 24V REMOTE CONTROL PANEL                      |          |                |
| ONE EXHAUST FAN STARTER                       |          |                |
| VIBRATION ISOLATORS                           |          |                |
| REMOVABLE BIRDSCREEN                          |          |                |
| OPTIONAL FEATURES:                            |          |                |
| NOTES:                                        |          |                |
| SUPPLY AIR FLOW RANGE: 3,200 CFM TO 6,800 CFM |          |                |

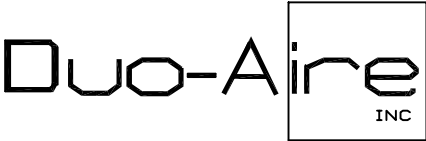


GENERAL NOTES

UNLESS OTHERWISE NOTED, ALL EXTERIOR SURFACES WILL BE 18 GA. GALVANIZED STEEL.

CURB SKIRT DETAIL

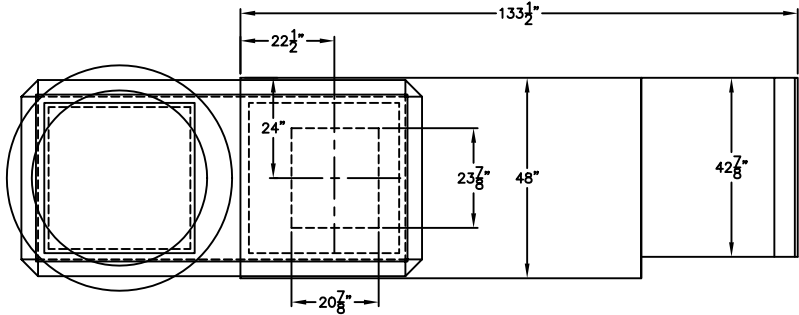


PLAN VIEW

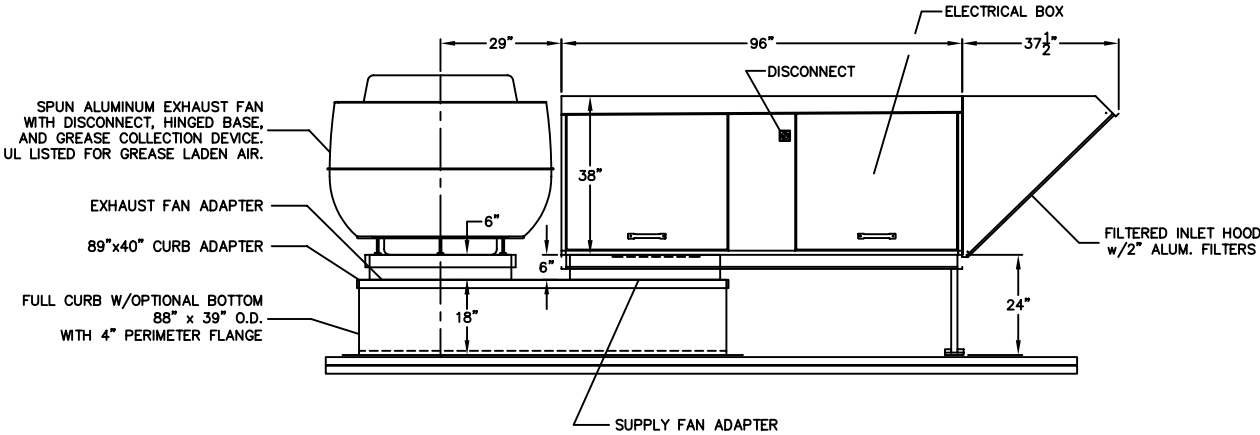

ELEVATION VIEW

|                       |
|-----------------------|
| PROJECT NAME:         |
| REF. NO./DRAWING NO.: |
| DATE:                 |



| ENGINEERING SPECIFICATIONS                    |          |                |
|-----------------------------------------------|----------|----------------|
| MODEL: CAA-NH-V4-CC                           |          |                |
| C.F.M.:                                       | T.S.P:   | E.S.P.:        |
| H.P.:                                         | VOLTAGE: | SERVICE AMPS.: |
| BLOWER MODEL # G18                            |          |                |
| STANDARD FEATURES:                            |          |                |
| GALVANIZED STEEL CASING; UNPAINTED            |          |                |
| DOWN DISCHARGE CONFIGURATION                  |          |                |
| 24V REMOTE CONTROL PANEL                      |          |                |
| ONE EXHAUST FAN STARTER                       |          |                |
| VIBRATION ISOLATORS                           |          |                |
| REMOVABLE BIRDSCREEN                          |          |                |
| OPTIONAL FEATURES:                            |          |                |
| NOTES:                                        |          |                |
| SUPPLY AIR FLOW RANGE: 4,900 CFM TO 8,100 CFM |          |                |

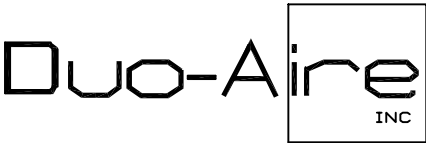


## GENERAL NOTES

UNLESS OTHERWISE NOTED, ALL EXTERIOR SURFACES WILL BE 18 GA. GALVANIZED STEEL.

## CURB SKIRT DETAIL

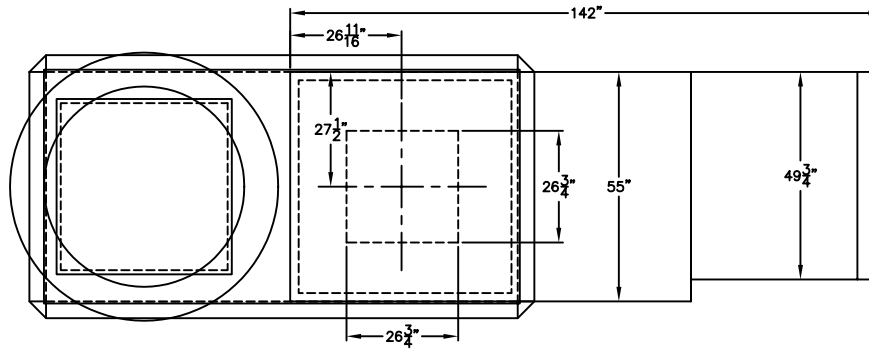

PLAN VIEW

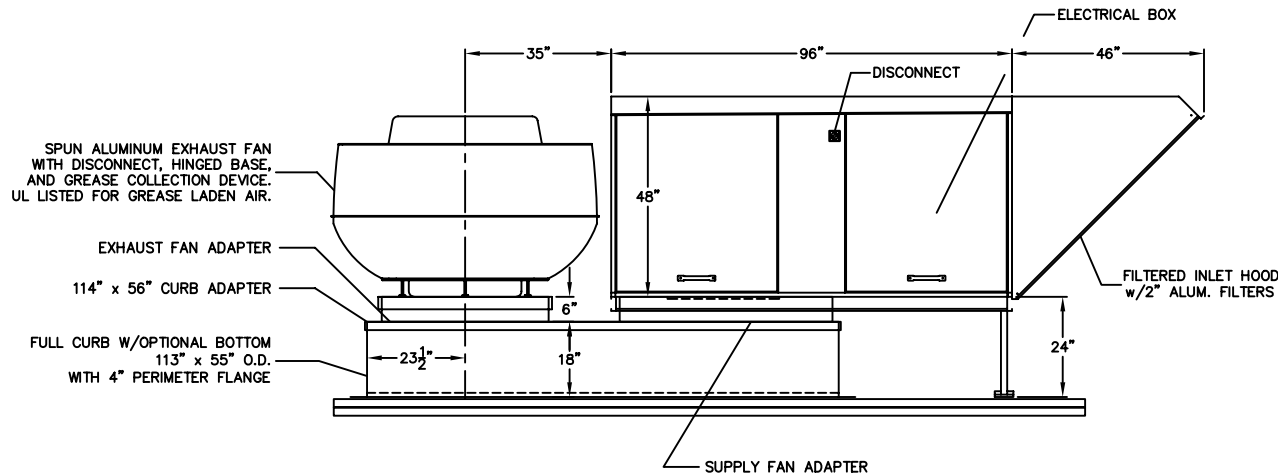

ELEVATION VIEW

PROJECT NAME:

REF. NO./DRAWING NO.:

DATE:

## ENGINEERING SPECIFICATIONS

MODEL: CAA-NH-V5-CC

C.F.M.:

T.S.P.:

E.S.P.:

H.P.:

VOLTAGE:

SERVICE AMPS.:

BLOWER MODEL # 920

### STANDARD FEATURES:

GALVANIZED STEEL CASING; UNPAINTED

DOWN DISCHARGE CONFIGURATION

24V REMOTE CONTROL PANEL

ONE EXHAUST FAN STARTER

VIBRATION ISOLATORS

REMOVABLE BIRDSCREEN

### OPTIONAL FEATURES:

### NOTES:



SUPPLY AIR FLOW RANGE: 6,800 CFM TO 13,000 CFM

Duo-Aire  
INC


GENERAL NOTES

UNLESS OTHERWISE NOTED, ALL EXTERIOR SURFACES WILL BE 18 GA. GALVANIZED STEEL.

CURB SKIRT DETAIL

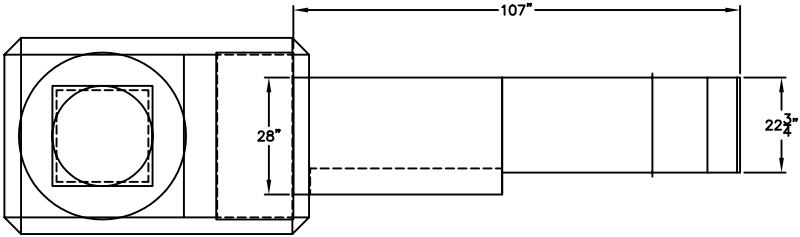


PLAN VIEW

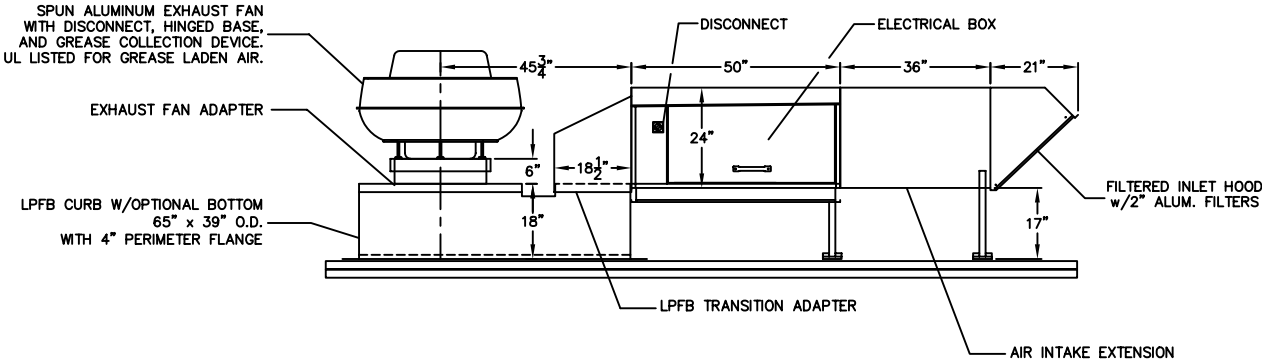

ELEVATION VIEW

|                       |
|-----------------------|
| PROJECT NAME:         |
| REF. NO./DRAWING NO.: |
| DATE:                 |



| ENGINEERING SPECIFICATIONS             |          |                |
|----------------------------------------|----------|----------------|
| MODEL: CAA-NH-V1-LPFB                  |          |                |
| C.F.M.:                                | T.S.P:   | E.S.P.:        |
| H.P.:                                  | VOLTAGE: | SERVICE AMPS.: |
| BLOWER MODEL # G10-8                   |          |                |
| STANDARD FEATURES:                     |          |                |
| GALVANIZED STEEL CASING; UNPAINTED     |          |                |
| HORIZONTAL DISCHARGE CONFIGURATION     |          |                |
| 24V REMOTE CONTROL PANEL               |          |                |
| ONE EXHAUST FAN STARTER                |          |                |
| VIBRATION ISOLATORS                    |          |                |
| REMOVABLE BIRDSCREEN                   |          |                |
| OPTIONAL FEATURES:                     |          |                |
| NOTES:                                 |          |                |
| SUPPLY AIR FLOW RANGE: UP TO 1,700 CFM |          |                |

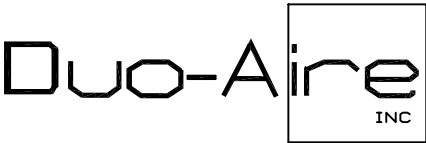


GENERAL NOTES

UNLESS OTHERWISE NOTED, ALL EXTERIOR SURFACES WILL BE 18 GA. GALVANIZED STEEL.

CURB SKIRT DETAIL

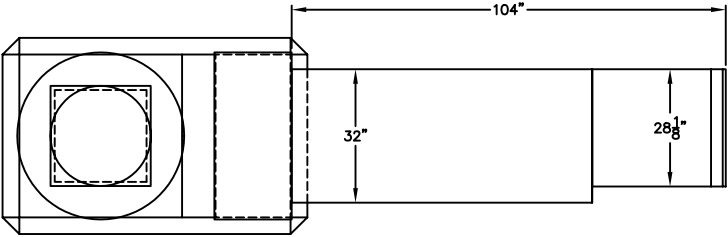

PLAN VIEW

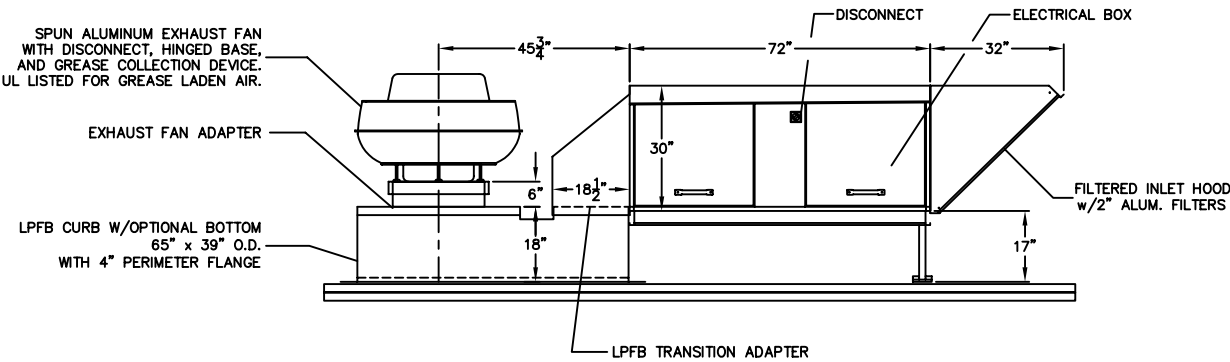

ELEVATION VIEW

PROJECT NAME:  
REF. NO./DRAWING NO.:  
DATE:

ENGINEERING SPECIFICATIONS

MODEL: CAA-NH-V2-LPFB  
C.F.M.: T.S.P.: E.S.P.:  
H.P.: VOLTAGE: SERVICE AMPS.:  
BLOWER MODEL # G10 OR G12

STANDARD FEATURES:


- GALVANIZED STEEL CASING; UNPAINTED
- HORIZONTAL DISCHARGE CONFIGURATION
- 24V REMOTE CONTROL PANEL
- ONE EXHAUST FAN STARTER
- VIBRATION ISOLATORS
- REMOVABLE BIRDSCREEN

OPTIONAL FEATURES:

NOTES:

SUPPLY AIR FLOW RANGE: 1,600 CFM TO 3,500 CFM



| CFM RANGE   | FAN SIZE |
|-------------|----------|
| 1,600-2,400 | G10      |
| 2,401-3,500 | G12      |




GENERAL NOTES

UNLESS OTHERWISE NOTED, ALL EXTERIOR SURFACES WILL BE 18 GA. GALVANIZED STEEL.

CURB SKIRT DETAIL

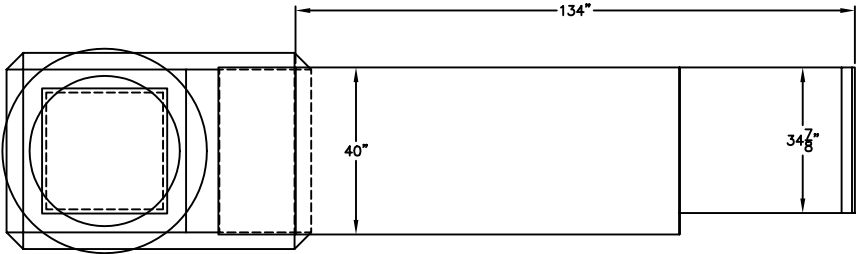


PLAN VIEW

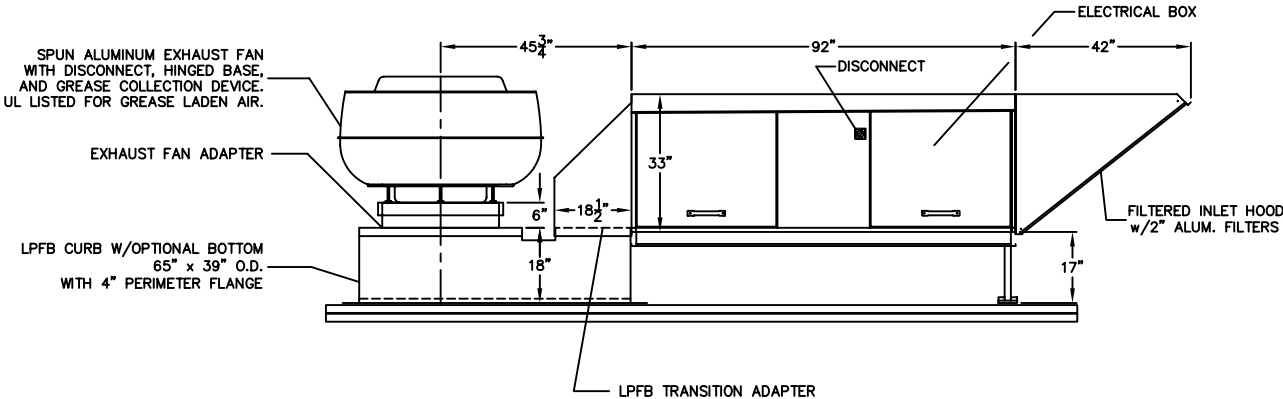

ELEVATION VIEW

|                       |
|-----------------------|
| PROJECT NAME:         |
| REF. NO./DRAWING NO.: |
| DATE:                 |



| ENGINEERING SPECIFICATIONS                    |          |                |
|-----------------------------------------------|----------|----------------|
| MODEL: CAA-NH-V3-LPFB                         |          |                |
| C.F.M.:                                       | T.S.P.:  | E.S.P.:        |
| H.P.:                                         | VOLTAGE: | SERVICE AMPS.: |
| BLOWER MODEL # G15                            |          |                |
| STANDARD FEATURES:                            |          |                |
| GALVANIZED STEEL CASING; UNPAINTED            |          |                |
| HORIZONTAL DISCHARGE CONFIGURATION            |          |                |
| 24V REMOTE CONTROL PANEL                      |          |                |
| ONE EXHAUST FAN STARTER                       |          |                |
| 1" INTERNAL INSULATION                        |          |                |
| REMOVABLE BIRDSCREEN                          |          |                |
| OPTIONAL FEATURES:                            |          |                |
| NOTES:                                        |          |                |
| SUPPLY AIR FLOW RANGE: 3,200 CFM TO 6,800 CFM |          |                |

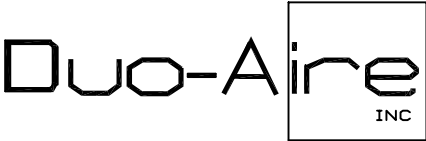


GENERAL NOTES

UNLESS OTHERWISE NOTED, ALL EXTERIOR SURFACES WILL BE 18 GA. GALVANIZED STEEL.

CURB SKIRT DETAIL

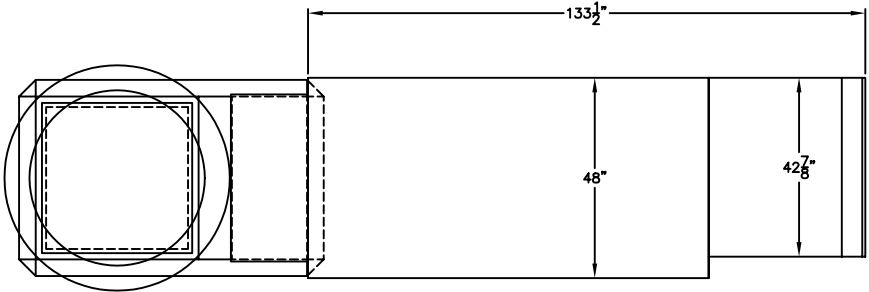


PLAN VIEW

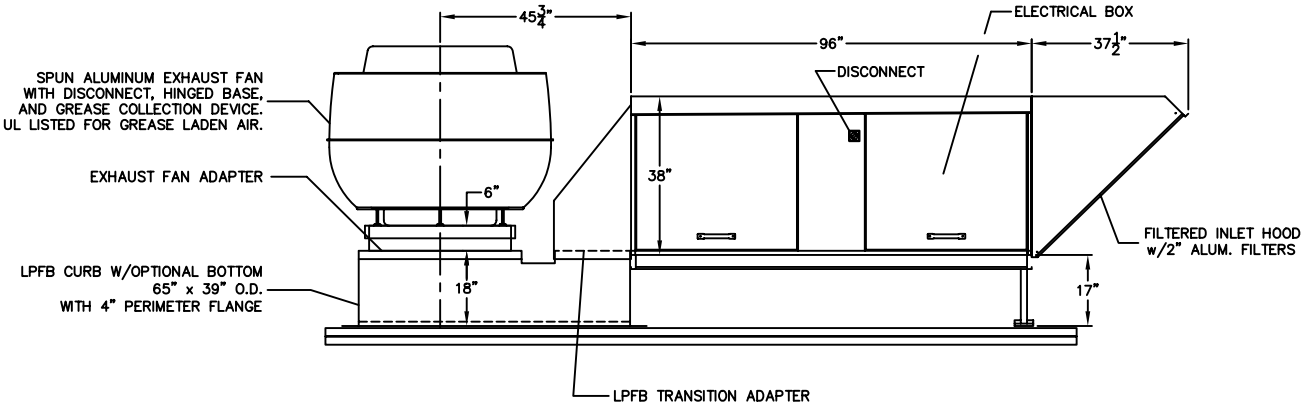

ELEVATION VIEW

|                       |
|-----------------------|
| PROJECT NAME:         |
| REF. NO./DRAWING NO.: |
| DATE:                 |



| ENGINEERING SPECIFICATIONS                    |          |                |
|-----------------------------------------------|----------|----------------|
| MODEL: CAA-NH-V4-LPFB                         |          |                |
| C.F.M.:                                       | T.S.P.:  | E.S.P.:        |
| H.P.:                                         | VOLTAGE: | SERVICE AMPS.: |
| BLOWER MODEL # G18                            |          |                |
| STANDARD FEATURES:                            |          |                |
| GALVANIZED STEEL CASING; UNPAINTED            |          |                |
| HORIZONTAL DISCHARGE CONFIGURATION            |          |                |
| 24V REMOTE CONTROL PANEL                      |          |                |
| ONE EXHAUST FAN STARTER                       |          |                |
| VIBRATION ISOLATORS                           |          |                |
| REMOVABLE BIRDSCREEN                          |          |                |
| OPTIONAL FEATURES:                            |          |                |
| NOTES:                                        |          |                |
| SUPPLY AIR FLOW RANGE: 4,900 CFM TO 8,100 CFM |          |                |

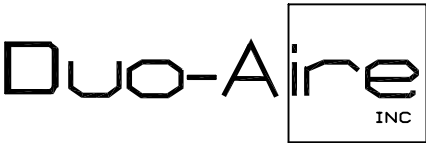


GENERAL NOTES

UNLESS OTHERWISE NOTED, ALL EXTERIOR SURFACES WILL BE 18 GA. GALVANIZED STEEL.

CURB SKIRT DETAIL

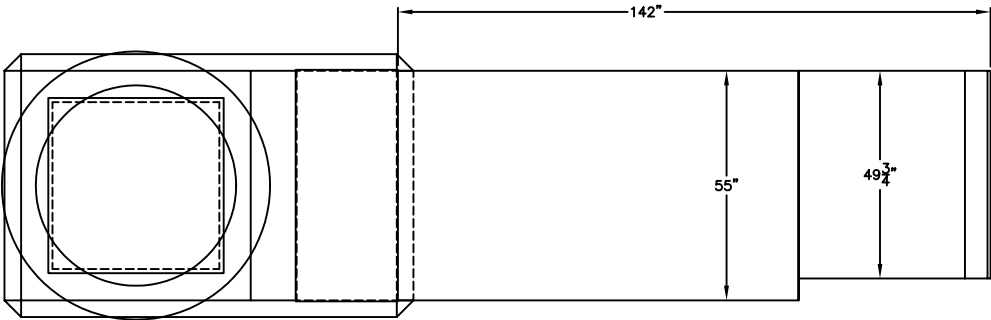


PLAN VIEW

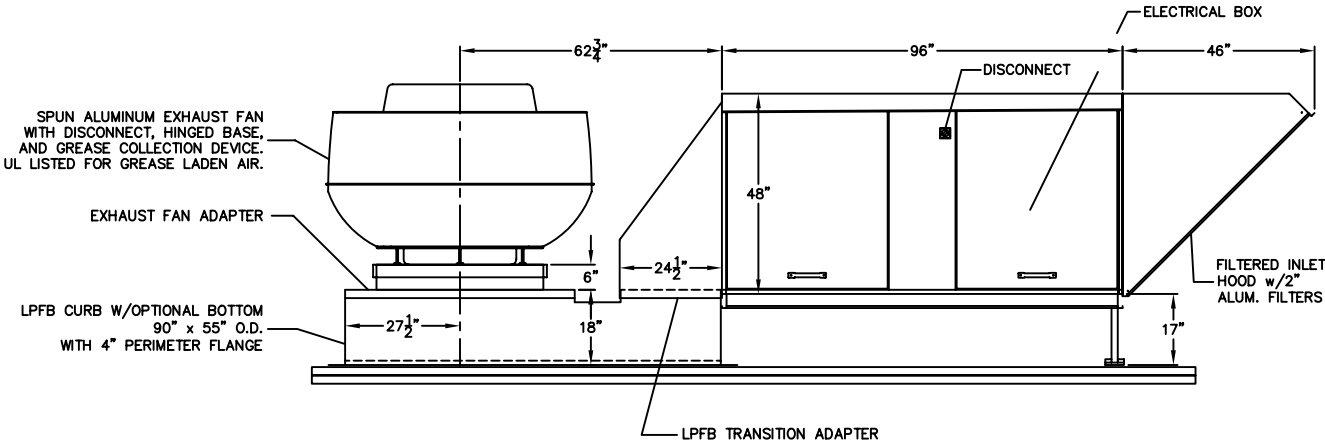

ELEVATION VIEW

PROJECT NAME:  
REF. NO./DRAWING NO.:  
DATE:



| ENGINEERING SPECIFICATIONS                     |          |                |
|------------------------------------------------|----------|----------------|
| MODEL: CAA-NH-V5-LPFB                          |          |                |
| C.F.M.:                                        | T.S.P:   | E.S.P.:        |
| H.P.:                                          | VOLTAGE: | SERVICE AMPS.: |
| BLOWER MODEL # 920                             |          |                |
| STANDARD FEATURES:                             |          |                |
| GALVANIZED STEEL CASING; UNPAINTED             |          |                |
| HORIZONTAL DISCHARGE CONFIGURATION             |          |                |
| 24V REMOTE CONTROL PANEL                       |          |                |
| ONE EXHAUST FAN STARTER                        |          |                |
| VIBRATION ISOLATORS                            |          |                |
| REMOVABLE BIRDSCREEN                           |          |                |
| OPTIONAL FEATURES:                             |          |                |
| NOTES:                                         |          |                |
| SUPPLY AIR FLOW RANGE: 6,800 CFM TO 13,000 CFM |          |                |

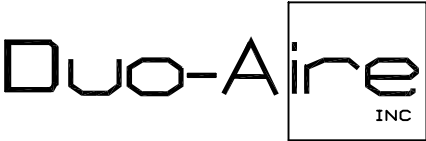


GENERAL NOTES

UNLESS OTHERWISE NOTED, ALL EXTERIOR SURFACES WILL BE 18 GA. GALVANIZED STEEL.

CURB SKIRT DETAIL

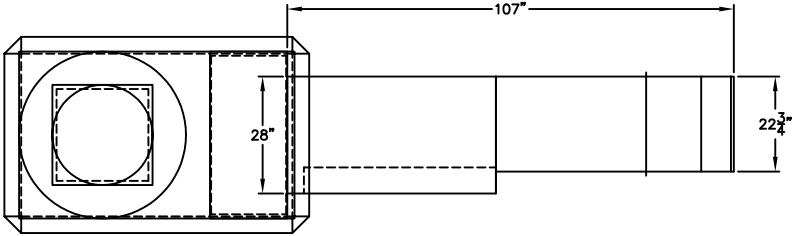


PLAN VIEW

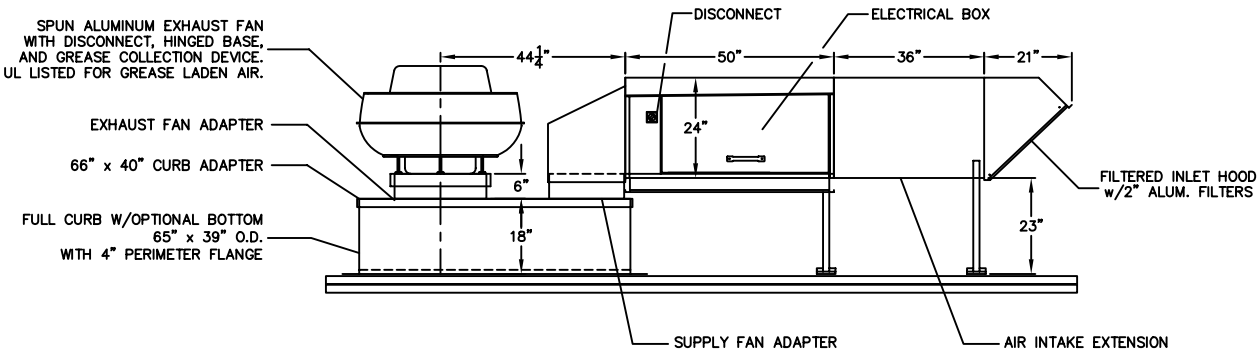

ELEVATION VIEW

|                       |
|-----------------------|
| PROJECT NAME:         |
| REF. NO./DRAWING NO.: |
| DATE:                 |



| ENGINEERING SPECIFICATIONS             |          |                |
|----------------------------------------|----------|----------------|
| MODEL: CAA-NH-V1-LPFB                  |          |                |
| C.F.M.:                                | T.S.P.:  | E.S.P.:        |
| H.P.:                                  | VOLTAGE: | SERVICE AMPS.: |
| BLOWER MODEL # G10-8                   |          |                |
| STANDARD FEATURES:                     |          |                |
| GALVANIZED STEEL CASING; UNPAINTED     |          |                |
| HORIZONTAL DISCHARGE CONFIGURATION     |          |                |
| 24V REMOTE CONTROL PANEL               |          |                |
| ONE EXHAUST FAN STARTER                |          |                |
| VIBRATION ISOLATORS                    |          |                |
| REMOVABLE BIRDSCREEN                   |          |                |
| OPTIONAL FEATURES:                     |          |                |
| NOTES:                                 |          |                |
| SUPPLY AIR FLOW RANGE: UP TO 1,700 CFM |          |                |

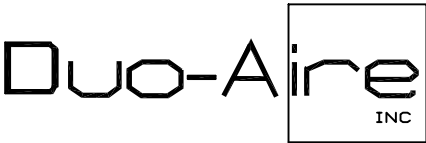


GENERAL NOTES

UNLESS OTHERWISE NOTED, ALL EXTERIOR SURFACES WILL BE 18 GA. GALVANIZED STEEL.

CURB SKIRT DETAIL

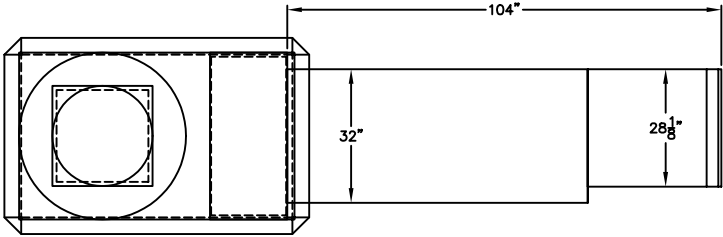

PLAN VIEW

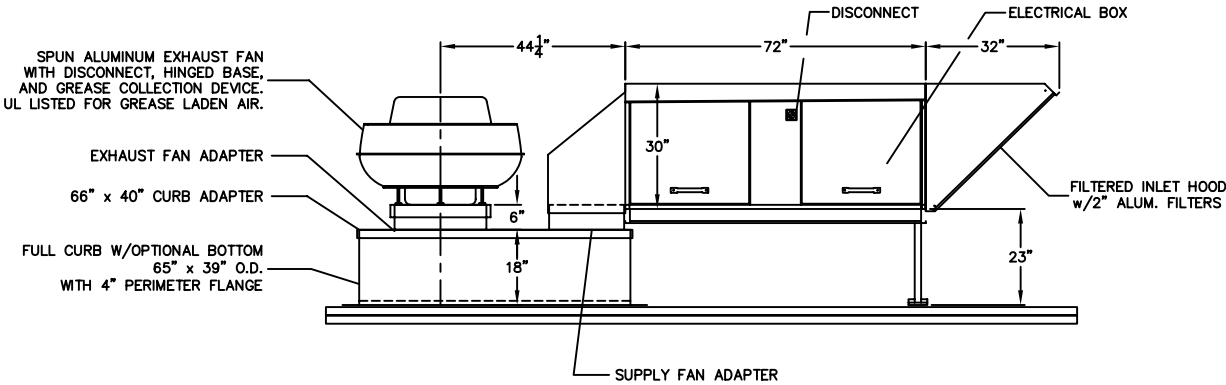

ELEVATION VIEW

PROJECT NAME:  
REF. NO./DRAWING NO.:  
DATE:

ENGINEERING SPECIFICATIONS

MODEL: CAA-NH-V2-LPFB  
C.F.M.: T.S.P.: E.S.P.:  
H.P.: VOLTAGE: SERVICE AMPS.:  
BLOWER MODEL # G10 OR G12

STANDARD FEATURES:


GALVANIZED STEEL CASING; UNPAINTED  
HORIZONTAL DISCHARGE CONFIGURATION  
24V REMOTE CONTROL PANEL  
ONE EXHAUST FAN STARTER  
VIBRATION ISOLATORS  
REMOVABLE BIRDSCREEN

OPTIONAL FEATURES:

NOTES:

SUPPLY AIR FLOW RANGE: 1,600 CFM TO 3,500 CFM



| CFM RANGE   | FAN SIZE |
|-------------|----------|
| 1,600-2,400 | G10      |
| 2,401-3,500 | G12      |

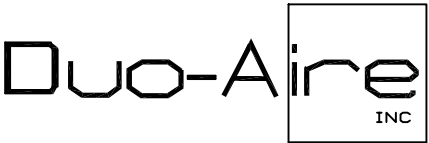


GENERAL NOTES

UNLESS OTHERWISE NOTED, ALL EXTERIOR SURFACES WILL BE 18 GA. GALVANIZED STEEL.

CURB SKIRT DETAIL

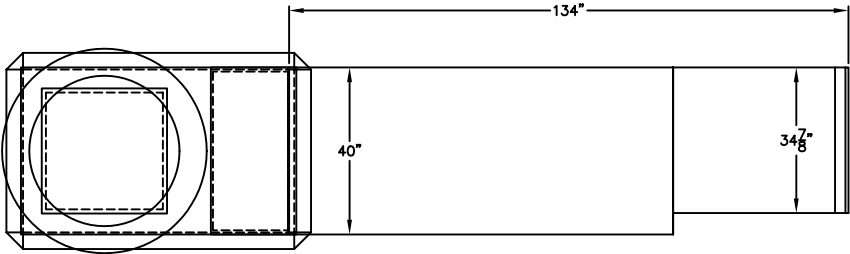


PLAN VIEW

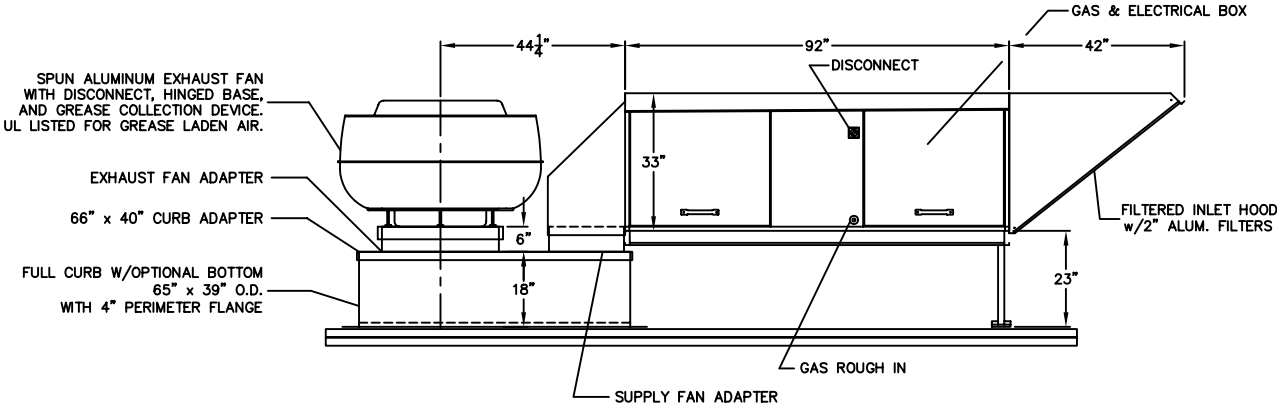

ELEVATION VIEW

|                       |
|-----------------------|
| PROJECT NAME:         |
| REF. NO./DRAWING NO.: |
| DATE:                 |



| ENGINEERING SPECIFICATIONS                    |          |                |
|-----------------------------------------------|----------|----------------|
| MODEL: CAA-NH-V3-LPFB                         |          |                |
| C.F.M.:                                       | T.S.P:   | E.S.P.:        |
| H.P.:                                         | VOLTAGE: | SERVICE AMPS.: |
| BLOWER MODEL # G15                            |          |                |
| STANDARD FEATURES:                            |          |                |
| GALVANIZED STEEL CASING; UNPAINTED            |          |                |
| HORIZONTAL DISCHARGE CONFIGURATION            |          |                |
| 24V REMOTE CONTROL PANEL                      |          |                |
| ONE EXHAUST FAN STARTER                       |          |                |
| VIBRATION ISOLATORS                           |          |                |
| REMOVABLE BIRDSCREEN                          |          |                |
| OPTIONAL FEATURES:                            |          |                |
| NOTES:                                        |          |                |
| SUPPLY AIR FLOW RANGE: 3,200 CFM TO 6,800 CFM |          |                |

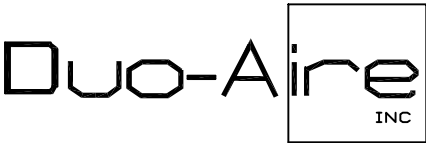


## GENERAL NOTES

UNLESS OTHERWISE NOTED, ALL EXTERIOR SURFACES WILL BE 18 GA. GALVANIZED STEEL.

## CURB SKIRT DETAIL

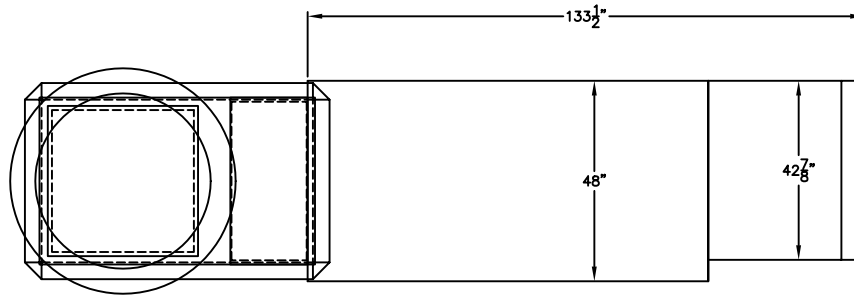

PLAN VIEW

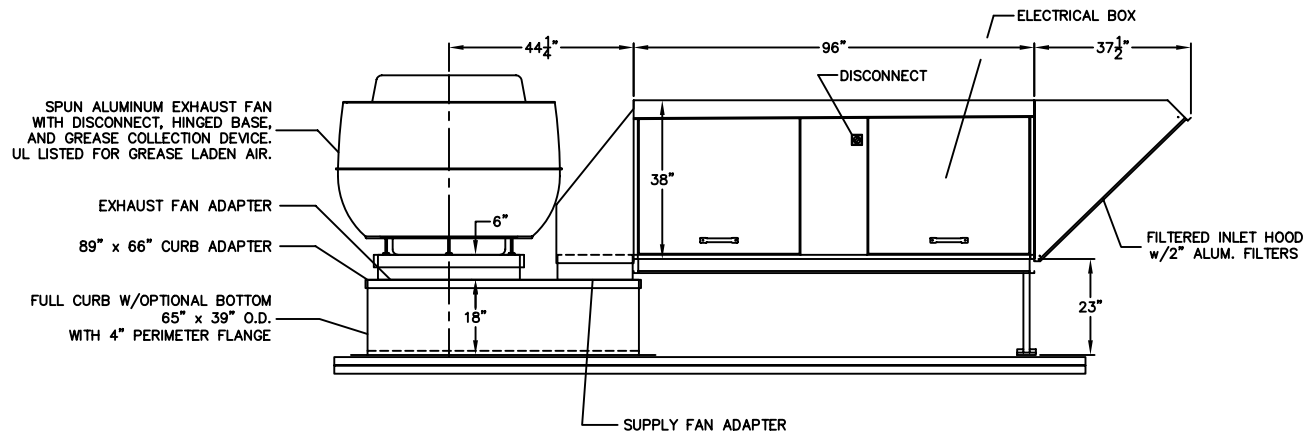

ELEVATION VIEW

PROJECT NAME:

REF. NO./DRAWING NO.:

DATE:

## ENGINEERING SPECIFICATIONS

MODEL: CAA-NH-V4-LPFB

C.F.M.: T.S.P.: E.S.P.:

H.P.: VOLTAGE: SERVICE AMPS.:

BLOWER MODEL # G18

### STANDARD FEATURES:

GALVANIZED STEEL CASING; UNPAINTED

HORIZONTAL DISCHARGE CONFIGURATION

24V REMOTE CONTROL PANEL

ONE EXHAUST FAN STARTER

VIBRATION ISOLATORS

REMOVABLE BIRDSCREEN

### OPTIONAL FEATURES:

### NOTES:



SUPPLY AIR FLOW RANGE: 4,900 CFM TO 8,100 CFM

Duo-Aire  
INC


## GENERAL NOTES

UNLESS OTHERWISE NOTED, ALL EXTERIOR SURFACES WILL BE 18 GA. GALVANIZED STEEL.

## CURB SKIRT DETAIL

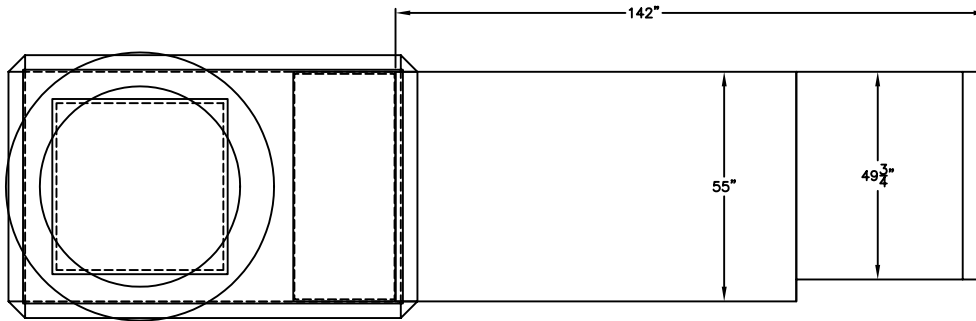

PLAN VIEW

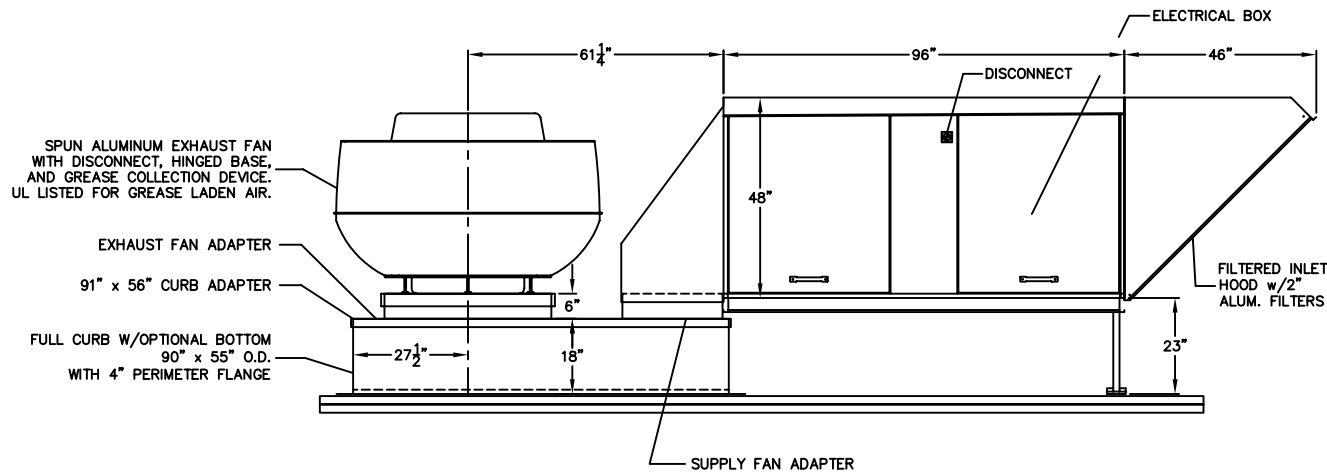

ELEVATION VIEW

PROJECT NAME:

REF. NO./DRAWING NO.:

DATE:

## ENGINEERING SPECIFICATIONS

MODEL: CAA-NH-V5-LPFB

C.F.M.: T.S.P.: E.S.P.:

H.P.: VOLTAGE: SERVICE AMPS.:

BLOWER MODEL # 920

### STANDARD FEATURES:

GALVANIZED STEEL CASING; UNPAINTED

HORIZONTAL DISCHARGE CONFIGURATION

24V REMOTE CONTROL PANEL

ONE EXHAUST FAN STARTER

VIBRATION ISOLATORS

REMOVABLE BIRDSCREEN

### OPTIONAL FEATURES:

### NOTES:

SUPPLY AIR FLOW RANGE: 6,800 CFM TO 13,000 CFM

Duo-Aire  
INC